

SYREN



OPERATOR'S MANUAL

Version 1.0
20160917



2117 East 5th Street
Superior, WI 54880 USA
tel: 715-398-3627
fax: 715-398-3279
www.cranesong.com

© 2014 Crane Song, LTD.

Subject to change without notice.

Printed in the U.S.A.

SYREN is a classic sounding tube preamp in a 500 series package, using a dual triode circuit with a 12AX7 tube

SYREN features a dual gain stage circuit and allows overdrive effects. A switch selectable HI-z input is included. The low cut filter is at 90 Hz and is 24 db/octave. The pad has -15 db and -25 db settings to allow a wide input range of signals.


The audio path color is changed by modifying the second stage tube circuit so it has negative feedback or does not have negative feedback. This changes the interaction between the tube stages and thus the sound of the pre-amp. With negative feedback SYREN typically has a more accurate audio path with wider frequency response. Without negative feedback it has a more open warmer sound. The OPEN setting is more desired for over drive operation.


Because SYREN was designed for color and not specs the measured values will change greatly depending on the mode of operation. Turning the negative feedback off may or may not result in higher harmonic distortion, but will result in different harmonic content. The changing interaction between the tube stages makes the result difficult to predict. Gain settings, signal level, signal frequency and source impedance all contribute to the tube stage interaction.

The over load LEDs start to light at -6db with respect the tube compression or over load. With a little practice they will become useful in judging the gain settings. The LED's lighting a small amount does not mean distortion.

The input LED is an indicator of the drive level to the first stage, the only way to change this is with the PAD switch or changing the input signal level. The output gain LED is shows the level of the second tube stage before the OUTPUT GAIN pot. This is affected by the setting of the INPUT GAIN pot

SIGNAL FLOW

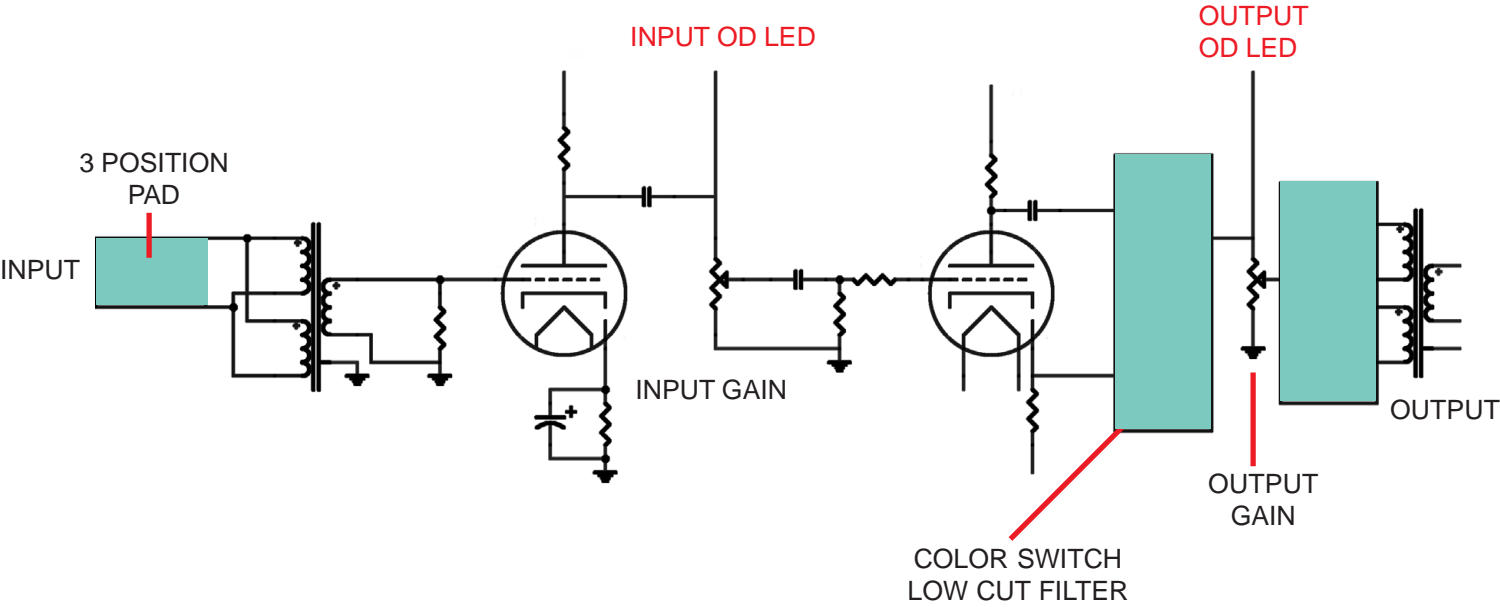

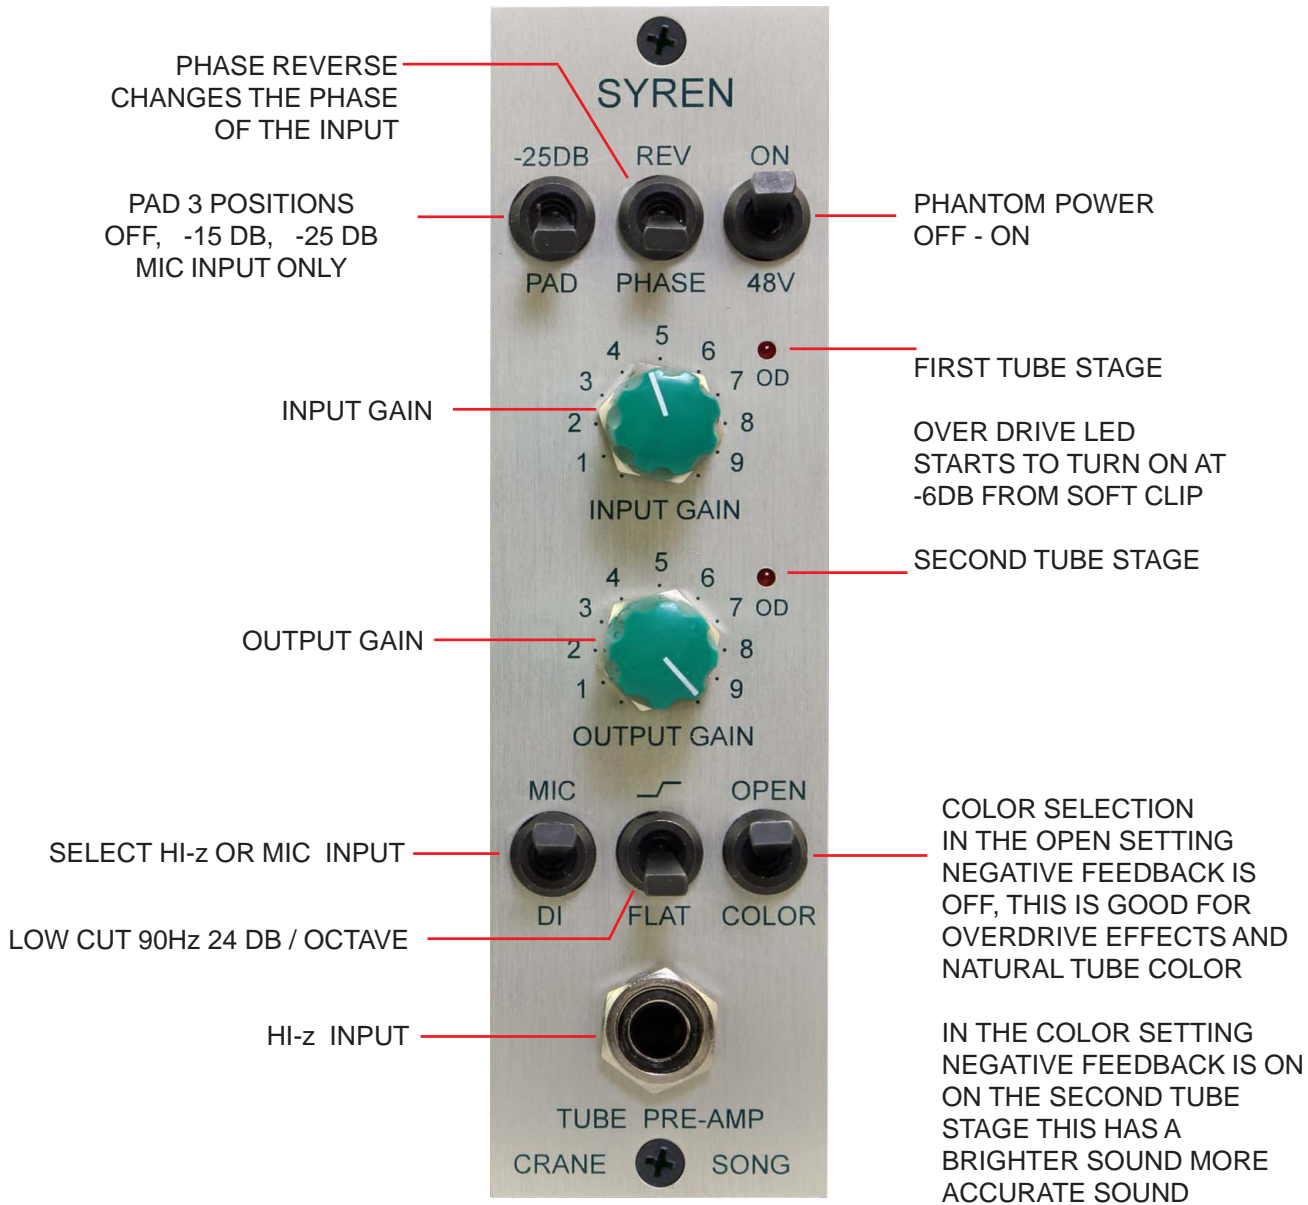

HOWEVER THE FINAL SOUND WILL BE DETERMINED BY THE SETTINGS OF THE GAIN CONTROLS, THE COLOR SWITCH AND THE SOURCE IMPEDANCE, EXPERIMENT A LITTLE. SETTING THE OUTPUT GAIN TO MAX WILL BE CLEANER, SOFT OVERDRIVE MORE COLORED.

SPECIFICATIONS

Pad: 0, -15, -25 db steps
Max Gain: 65db
Filter: 90Hz 24 db/oct
Power: 100mA with self resetting fuses

At 40db of gain, 0dbu output and a 150 ohm source

Harmonic Distortion : 0.5% second harmonic

Noise: -84dbu

Frequency Response: 6Hz to 80Khz

Tube: 12AX7B, selected for low microphonics

Lundahl Mu metal shielded transformers for both input and output